

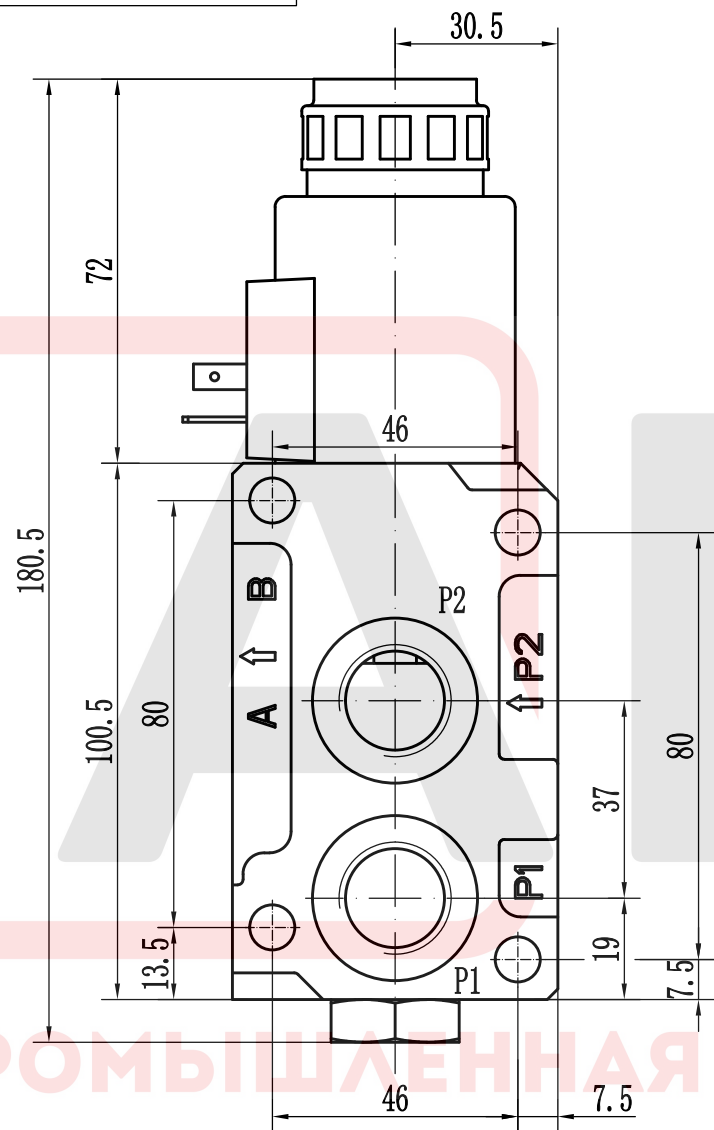
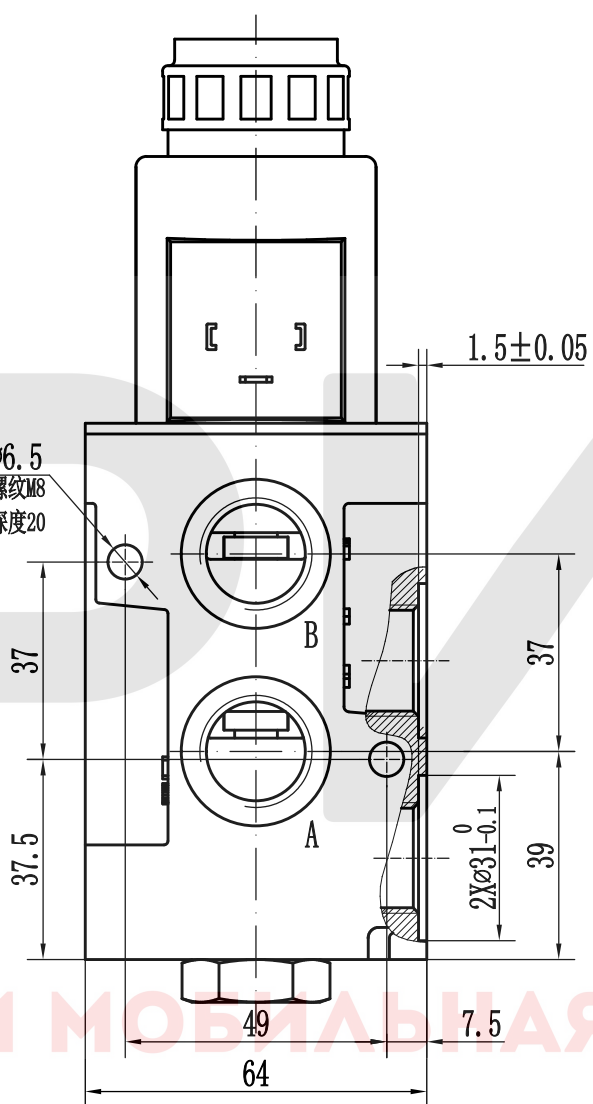


V-9ASH

1st-A

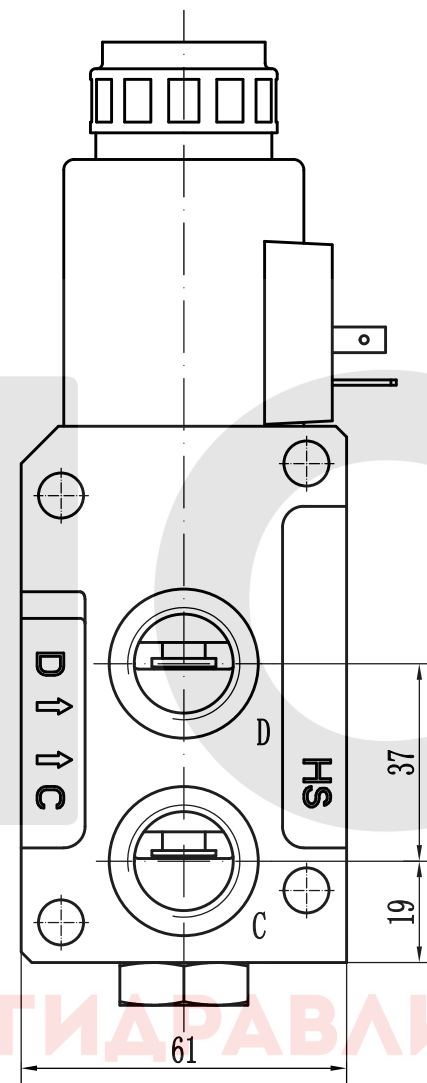

2X $\phi 6.5$   
背面螺纹M8  
有效深度20

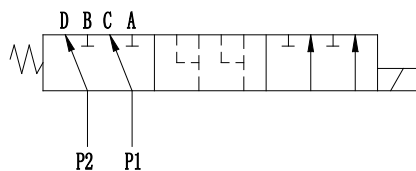

- Technical datas:
- 1.Rated flow:50L/min
  - 2.Max. pressure:31.5Mpa
  - 3.Voltage: 12V
  - 4.Ports:G3/8

**АРИС**  
ПРОМЫШЛЕННАЯ И МОБИЛЬНАЯ ГИДРАВЛИКА

Клапан DVS6, 50 l/  
min, stackable 12 V

HSV6- A

借(通)用件登记

描 图

CAD

描 校

旧底图总号

底图总号

签 字

日 期