

CONNECTION PORTS

Type	A
1	1-1/2 BSP
2	2 BSP

Type	B (mm)	C (mm)
1	176	51
2	236	51
3	236	64
4	282	64

1. Material:

Filter head: aluminum
Filter cartridge: nylon
Filter element: composite glass fiber
Seal: nitrile rubber

2. Work pressure

Max. 8 Bar

3. Traffic:

Contact sales

4. Working temperature:

-10 °C ~ +100 °C

5. Filtering accuracy:

Optional 3, 5, 10, 20, 50, 100 (μm)

6. Filter element and indicator models

Filter element: CR22*
Transmitter: SPQ

7. Bypass opening and indicator light

Bypass valve opening pressure: 1.7 Bar
Indicator: visual/electrical

8. Appearance

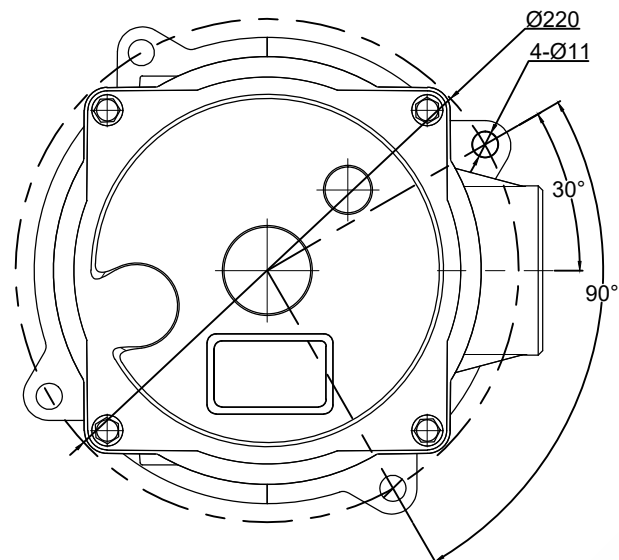
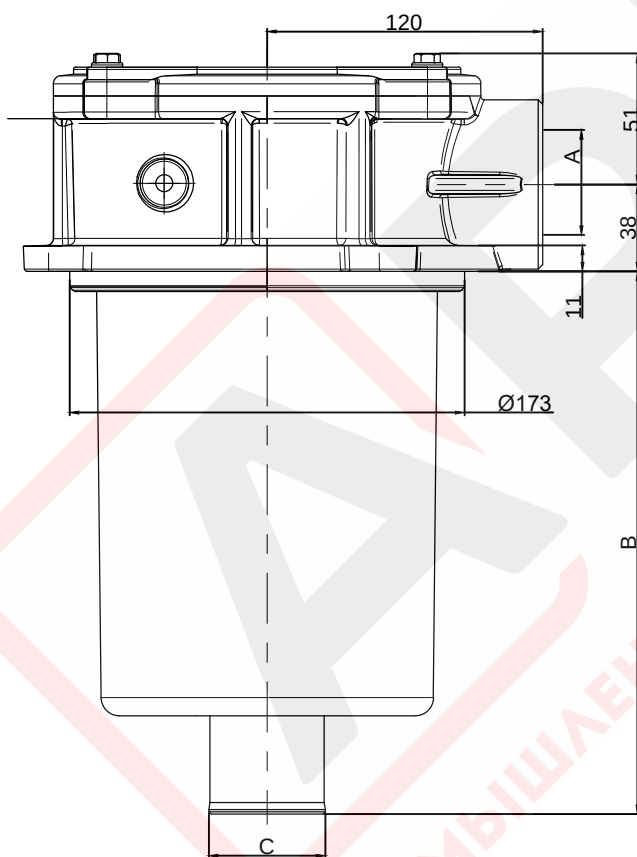
Surface sandblasting treatment

9. Product features

- 1: The product filter element is equipped with a bypass valve
- 2: An extension tube can be added to the bottom of the product according to customer needs

10. Things to note

After product processing and assembly, an air tightness test should be conducted.
Test pressure: 8 Bar

[illegible]